

5241 SERIES KEY SWITCH


2 GANG PLATE

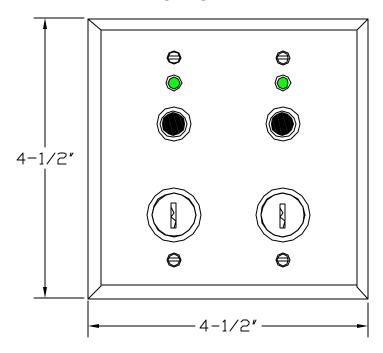


1 GANG PLATE



NARROW PLATE

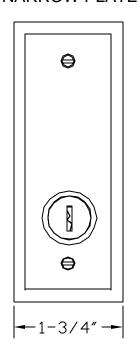

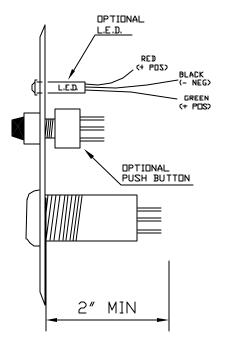

KEY SWITCHES

SPDT K24

(1 SET OF CONTACTS SHOWN)

| YELLOW N.C.
| GRAY COM.
| IRANGE N.O.

(2ND SET OF CONTACTS SHOWN)

PURPLE N.C.
BROWN
COM.
GREEN N.D.

DPDT- K331/332

PUSH BUTTONS

SPDT P15

(1 SET OF CONTACTS SHOWN)


RED N.C.

RED N.C.


BLACK COM.

WHITE N.D.

DPDT-P25



L.E.D. OPTION



SPECS:

SWITCH RATING:
3A @ 115VAC OR 28VDC
UL RECOGNIZED/CSA CERTIFIED

DPERATING TEMP: +5F - +158F

L.E.D. RATING: .02A @24VDC

FACE PLATE: .032 THICK STAINLESS