


7201 SERIES HI-INTENSITY LEDs

HI-INTENSITY LED INDICATORS

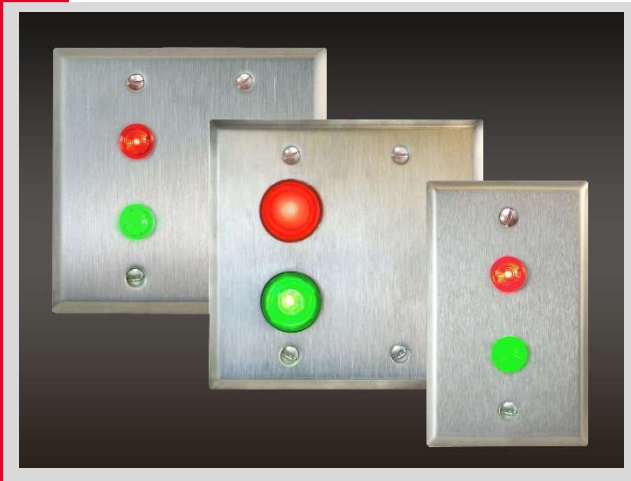

Features:

Highly Visible

Daylight Viewing

Exterior / Interior Applications

Maintenance-free Long Lasting

Compact Standard or Custom Plates

Quick & Easy Mounting

Optional Piezo Sounder

Super Bright LEDs:

These hi-intensity LEDs are highly visible in virtually any lighting condition, including bright sunlight. Door security status can be immediately conveyed to system users and security personnel.

Wide Angle Viewing:

The large diameter lens on the standard hi-intensity LEDs are easily viewed even from off-center. The weather-resistant hi-intensity LEDs are furnished with an even larger sealed LED lens for maximum outdoor visibility.

Interior or Exterior Use:

The weather-resistant units are ideal perimeter access control gates exposed to the weather. If mounted near card readers, the LEDs can be used to clearly indicate when individual doors and/or gates can be accessed. Perfect for industrial applications, these LEDs are easily seen when viewed from a truck cab or forklift.

Compact Size:

Two LEDs, typically one red and one green will easily fit on a standard single gang wall plate. When mullion mounting is required a narrow 1-3/4" wide plate can be supplied.

Easy Universal Installation:

Standard mounting hardware allows easy installation onto standard single gang junction boxes. All Dortronics LED indicators are field selectable for 12 or 24 volts DC operation.

Long Lasting:

Dortronics hi-intensity indicators are solid-state LEDs manufactured from highly quality semiconductor materials. LEDs are noted for their extremely long life and these may never need replacement. In addition, LEDs typically draw only about 5% of the power of a comparable incandescent component, allowing smaller, less costly power supplies.

Customized Configurations:

The 7200 series hi-intensity LEDs can be used in lieu of standard bi-color T-1-3/4 LEDs and factory applied onto double or triple gang switch plates with any of the Dortronics standard push buttons or key switches. Other configurations are also possible using custom sized plates. Contact the factory for assistance in determining the exact size of custom plates.

Optional Piezo Sounder:


Available with either indoor or Weather proof outdoor Piezo mounted on the plate.



WATER PROOF SERIES

7201xL2-HWR


1 GANG STAINLESS STEEL PLATE
2 HI-INTENSITY WATER PROOF LED'S

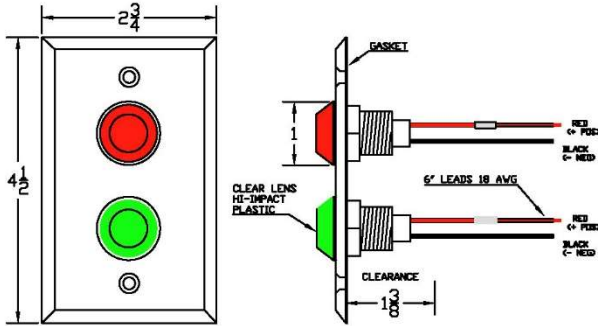

INDOOR SERIES


7201xL2-H

1 GANG STAINLESS STEEL PLATE
2 HI-INTENSITY LED'S

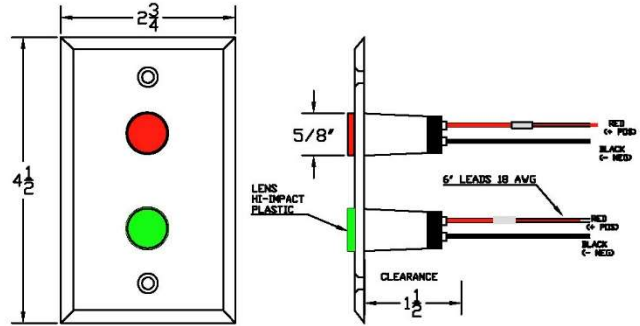



7202xL2-HWRxCSW

2 GANG STAINLESS STEEL PLATE
2 HI-INTENSITY WATER PROOF LED'S
1 WATERPROOF PIEZO SOUNDER



7201xL1-HWRxCSW

1 GANG STAINLESS STEEL PLATE
1 HI-INTENSITY WATER PROOF LED'S
1 WATERPROOF PIEZO SOUNDER



Example Model Descriptions:

7201xL1-H = 1 High Intensity LED mounted on a 1 gang Stainless Steel Plate

7201xL2-H = 2 High Intensity LEDs mounted on a 1 gang Stainless Steel Plate

7202xL2-HxCS = 2 High Intensity LEDs with continuous Piezo sounder mounted on a 2 gang Stainless Steel Plate

7201xL1-HWR = 1 High Intensity Water Proof LED on a 1-gang Stainless Steel Plate

7201xL2-HWR = 2 High Intensity LEDs Water Proof LEDs on a 1-gang Stainless Steel Plate

7202xL2-HWRxCSW = 2 High Intensity Water Proof LEDs with Water Proof Piezo Sounder mounted on a 2 gang Stainless Steel Plate

Ratings:

LEDs – Rated .04 Amps @ 12-24 VDC.
Nylon Body with Polycarbonate lens

-HWR Water Proof series has gaskets behind each LED and Plate

Piezo Sounder – Standard indoor
Rated – 20 mA @ 3-28 VDC.
Sound Pressure – 100 dBA @ 10 cm (Min.)
Resonant Frequency – 4500 Hz

Piezo Sounder – Water Proof IP 68
Rated – 2 mA @ 5 VDC,
10 mA @ 30 VDC
Sound Pressure – 95 dBA @ 24"
Resonant Frequency – 2900 Hz

Gang Plates – Stainless steel 304
US23D Satin Finish
1-Gang 4-1/2 x 2-3/4"
2-Gang 4-1/2 x 4-1/2"
Narrow 4-1/2 x 1-3/4"

Specifications :

High Intensity LED Indicators shall be manufactured by Dortronics Systems, Inc. Furnish 7200 series LED indicators using standard indoor or weather-resistant exterior units as may be appropriate. Exterior mounted indicators shall have sealing gaskets behind each LED and between the mounting plate and the junction box.

Where noted, supply Dortronics optional indoor style piezo sounder or optional weather-resistant outdoor piezo sounder.

Mounting plates shall be constructed of #304 stainless steel US23D satin Finish in single or double gang and supplied with optional paint filled engraving as noted. Attachment screws shall be slotted oval head stainless steel. For extra security, pin-in-hex head tamper-resistant screws shall be supplied where required.



DORTRONICS SYSTEMS, INC.

1668 Sag Harbor Tpke., Sag Harbor, NY 11963 (800) 906-0137 (631) 725-8148 Fax www.dortronics.com